




Polymer Modified
Gypsum Patch and Skim Coat

POLYSKIM®

The Fast-Drying, Trowel-Friendly Underlayment That Makes Installation a Breeze. **POLYSKIM®** is a premium polymer modified gypsum underlayment, perfect for leveling & smoothing out gypsum & wood substrates. Dries quickly to a hard durable surface.

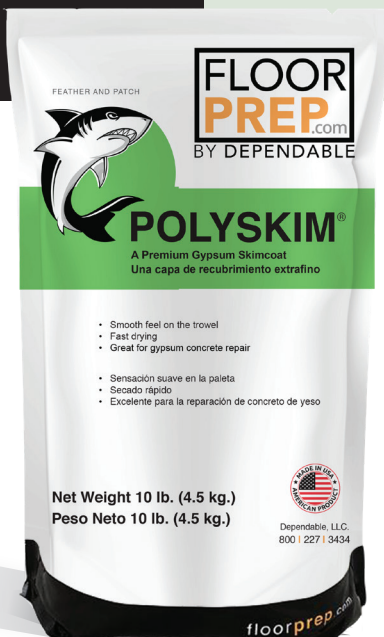

FEATURES

- › Smooth feel on the trowel
- › Fast drying
- › Great for gypsum concrete repair

SUITABLE SUBSTRATES

- › Gypsum Substrates
- › Wood
- › Concrete
- › Quarry & Ceramic Tile




The Fast-Drying, Trowel-Friendly Underlayment

POLYSKIM® is a premium gypsum-based skim coat designed for use over gypsum concrete, wood, and other surfaces. **POLYSKIM's** polymer modified formula allows for a creamier feel under the trowel, enhanced bond, and superior dry time.

Properties

Working Time	20 Minutes		
Time to foot traffic	30 Minutes		
Application Conditions	Dry, interior environment above 50°F (10°C)		
Coverage		10 lb.	25 lb.
	As a Skim coat	100 - 300 ft²	250 - 750ft²
	1/8" (3mm)	30 - 36 ft²	75 - 90 ft²
	1/4" (6mm)	15 - 18 ft²	37.5 - 45 ft²
Water per 10lb unit	5.5 qts. of water to 25 lb. bag 2.25 qts. of water to 10 lb. bag		
Color	White		
Shelf Life	9 Months when unopened & stored per instructions		
SKU	DPS25 / DPS4X10		

All specifications were tested in laboratory conditions: 73°F in a controlled environment using our approved water content. Changing the temperature, or mixing ratios, or the environment can effect these specifications. Call Technical Services if you have any questions.

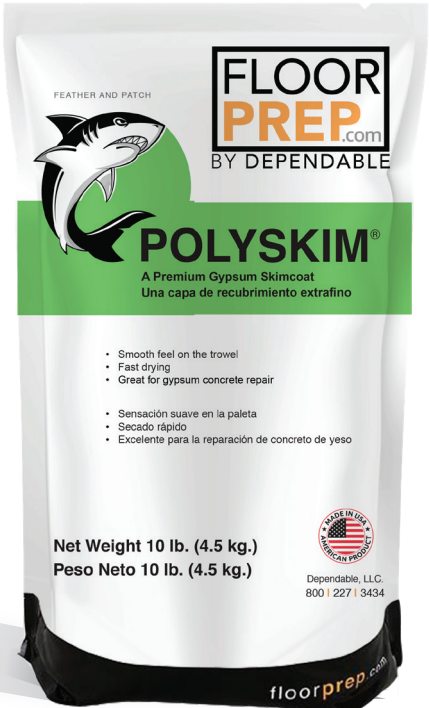

LEED Credit LCD Rapid may contribute to LEED certification of projects as follows:

AREA	CREDIT	CATEGORY	HOW
Indoor Environmental Quality	EQ 4.2	Low Emitting Materials	VOC content 0g/l (calculated)
Materials & Resources	MR 4.1, 4.2	Recycled Content	0%
Regional Manufactured Material	MR 5.1	Regional Materials (Cleveland, Ohio)	> 50%

Dependable LLC

2926 Chester Avenue, Cleveland, OH 44114
(877) 514-5336

Visit: FloorPrep.com
info@floorprep.com

