



Waterproof  
Uncoupling Membrane

**KeedeRoll™  
WT**

**KeedeRoll® WT** is a Watertight vapor-permeable uncoupling mat that delivers crack isolation, load distribution, and waterproofing—featuring a 6” overlap for fast, tape-free tile installation.




#### FEATURES

- › Built-in 6-Inch Seam Overlap: No need for seam tape, providing a watertight connection and faster installation.
- › Waterproof and Vapor-Permeable: Protects against water penetration while allowing vapor diffusion.
- › Excellent Crack Isolation: Reduces stress transfer from subfloor movement.
- › Compatible with Unmodified Mortar: Ensures proper bonding and performance.
- › Lightweight & Easy to Install

## High load bearing Watertight Uncoupling Mat

**KeedeRoll® WT** is a watertight, vapor-permeable uncoupling mat designed for use under ceramic, porcelain, and natural stone tile installations. It offers superior crack isolation, load distribution, and waterproofing protection for both residential and commercial applications. **KeedeRoll® WT** features a built-in 6-inch seam overlap, eliminating the need for seam tape and simplifying installation. It requires the use of unmodified mortar for proper adhesion, ensuring maximum performance and longevity.

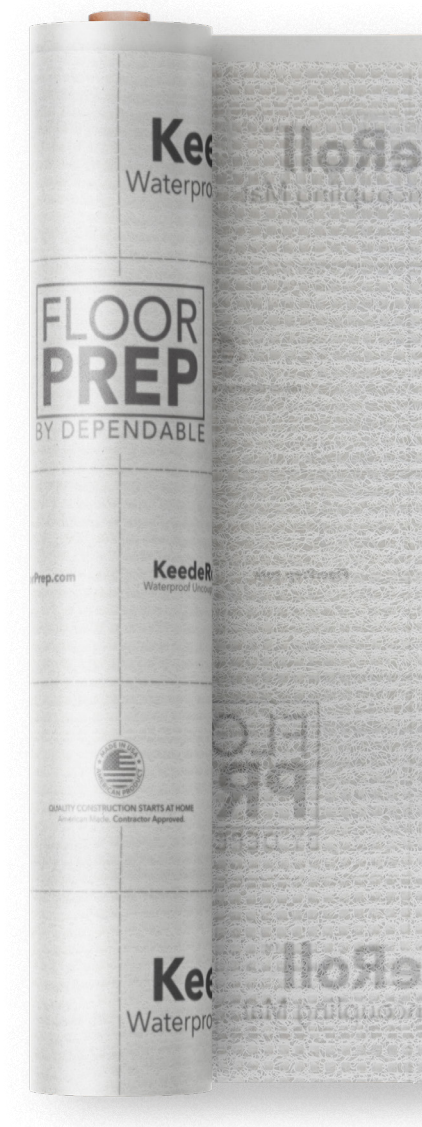

Technical Properties					
Property	Unit	Average Value	Min Value	Max Value	Test Method
Basic Weight	gsm	137.4	133.8	143.1	ASTM D5261
Thickness	mm	0.46	0.41	0.50	ASTM D777
Width	inch	48.0	—	—	—
MD Tensile Strength	lbf	105.3	102.2	108.2	ASTM D5035
CD Tensile Strength	lbf	77.9	75.0	82.9	ASTM D5035
MD Elongation	%	170.2	151.7	197.8	ASTM D5035
CD Elongation	%	174.2	142.7	210.7	ASTM D5035
MD Tear Strength	lbf	34.1	31.3	36.5	ASTM D4533
CD Tear Strength	lbf	21.8	19.2	25.3	ASTM D4533
Square Feet Per Roll		190 sq. ft			
Size		4 ft. (47.5") width by 50 ft. length			

