


Waterproof
 Uncoupling Membrane

KeedeRoll™ WT



KeedeRoll® WT is a watertight uncoupling mat that delivers dual defense protection with a waterproof barrier and Structured Strand™ layer for crack isolation and load distribution. Its built-in seam overlap, easy rollout design, and broad mortar compatibility make installation fast and reliable for any space.

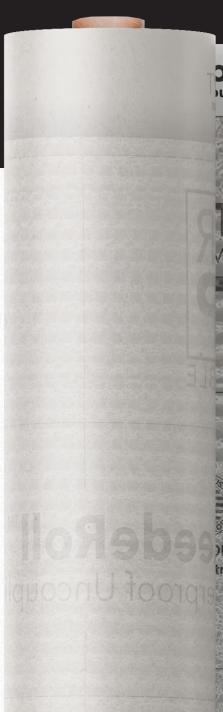

KeedeRoll™ WT
 Uncoupling Mat

TFORM™
 FLOORING
 A KEENE INC. COMPANY

ON STARTS AT HOME
 Contractor Approved.

THIS SIDE UP

PlatformPerformance.com

KeedeRoll™ WT
 Waterproof Uncoupling Mat

ACHIEVED EXTRA HEAVY RATING IN
 THE ROBINSON WHEEL TEST

FEATURES

- › Built-in seam overlap for added protection
- › Superior crack isolation and point-load deflection
- › Compatible with modified mortar: ensures proper bonding and performance.
- › Lay-Flat Technology
- › Easy to cut and install
- › Designed for residential and commercial applications
- › 10 Year Warranty

High Load-Bearing Watertight Uncoupling Mat

KeedeRoll® WT is a watertight uncoupling mat engineered for ceramic, porcelain, and natural stone tile installations. Its dual defense protects your investment with a waterproof barrier that stops moisture intrusion and a Structured Strand™ performance layer that provides superior crack isolation and load distribution—outperforming leading brands in reducing subfloor deflection. **KeedeRoll® WT** features a built-in seam overlap, eliminating the need for seam tape and simplifying installation.



Technical Properties					
Property	Unit	Average Value	Min Value	Max Value	Test Method
Basic Weight	gsm	137.4	133.8	143.1	ASTM D5261
Thickness	mm	0.46	0.41	0.50	ASTM D777
Width	inch	48.0	—	—	—
MD Tensile Strength	lbf	105.3	102.2	108.2	ASTM D5035
CD Tensile Strength	lbf	77.9	75.0	82.9	ASTM D5035
MD Elongation	%	170.2	151.7	197.8	ASTM D5035
CD Elongation	%	174.2	142.7	210.7	ASTM D5035
MD Tear Strength	lbf	34.1	31.3	36.5	ASTM D4533
CD Tear Strength	lbf	21.8	19.2	25.3	ASTM D4533
<hr/>					
Square Feet Per Roll	190 sq. ft				
Size	4 ft. (47.5") width by 50 ft. length				

